

LOXEAL 83-03

Description

Fast curing high strength anaerobic adhesive for locking and sealing threads and retaining of cylindrical components. Highly resistant to heat, corrosion, vibrations, water, gases, oils, hydrocarbons, and many chemicals.

Approved for Gas (Gaz de France).

Drinking water Certification. France: according to Eurofin Expertises Environnementales texts. (Dossier n° 14 CLP NY 005) product is in compliance with white lists - Ministère chargé de la santé DGS/VS4 n° 99/217 du 12 avril 1999 et DGS/VS4 n° 2000/232 du 27 avril 2000 (ACS).

Typical physical properties

Composition:	anaerobic methacrylate
Colour:	green
Viscosity (+25°C - mPa s):	1000
Specific weight (+25°C - g/ml):	1,1
Fluorescence:	under blue light
Max diameter of thread/ gap filling:	M 20 / 3/4" / 0,20 mm
Shelf life @+25°C:	1 year in unopened packaging

Typical curing performance

Curing rate depends on the assembly clearance, material surfaces and temperature. Functional strength is usually reached in 1-3 hours and full curing takes 24-36 hours. In case of passive surfaces and/or low temperature, a fast cure can be obtained using Loxeal Activator 11.

Typical curing properties

The following values are referred to test performed at +25°C on bolts M10 x 20 Zn - quality 8.8 - nut h = 0,8 d:

Handling time:	3 minutes
Functional cure time:	2 hours
Full cure time:	5 hours
Locking torque (ISO 10964):	
- breakaway Nm:	40
- prevailing Nm:	60

Shear strength (ISO 10123) N/mm²:	30
Impact strength (ASTM D 950) kJ/m²:	10
Temperature range:	-55°C/+200°C

Handling time on different substrates, minutes:


- Steel:	2
- Brass (OT 58):	< 1
- Nickered brass:	5

Environmental resistance

Hot strength


The graph below shows the mechanical strength vs. temperature.

Specimens – steel pin/collars tested in accordance with ISO 10123.

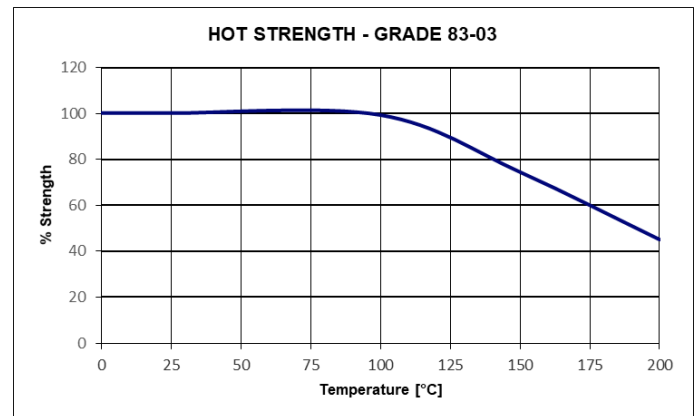


Cure speed vs substrate

The graph hereunder shows the breakaway strength development of the product (with time) on steel pin/collars tested in accordance with ISO 10123 at +25°C.

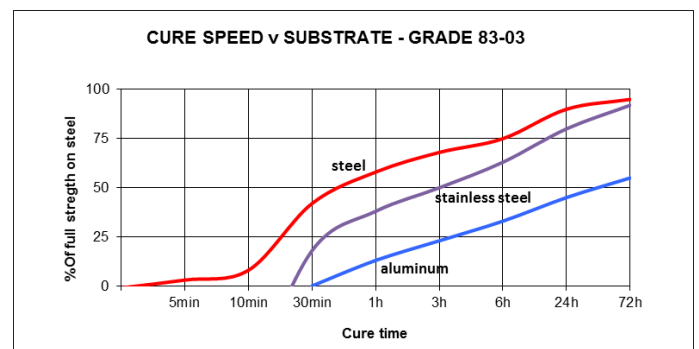


Cure speed vs gap

The graph below shows the product shear strength (as %) at different increasing controlled gaps.
Specimens - Steel pins/collars, tested in accordance with ISO 10123 at + 25°C.

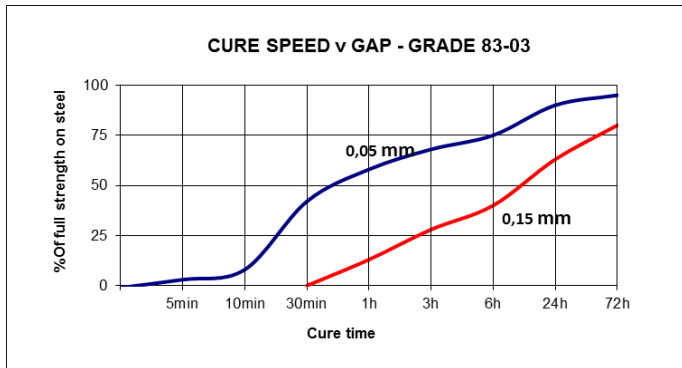


Cure Speed vs Temperature

The following graph shows the breakaway strength of the product (as %) at different temperatures.
Specimens – steel pin/collars tested in accordance with ISO 10123.

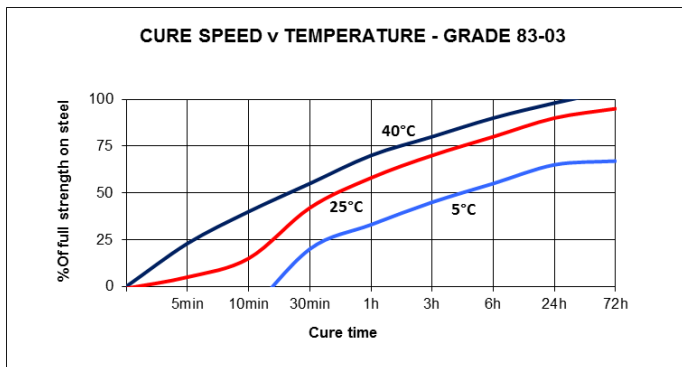


Cure Speed vs Activator

Polymerization could be slowed down by substrate nature, large gaps; cure speed can be improved by applying appropriate activator to the substrate(s).
The following graph shows the breakaway strength of the product (as %) and the cure speed developments using our activator 11, compared to the ones with no activator.
Specimens – steel pin/collars tested in accordance with ISO 10123.

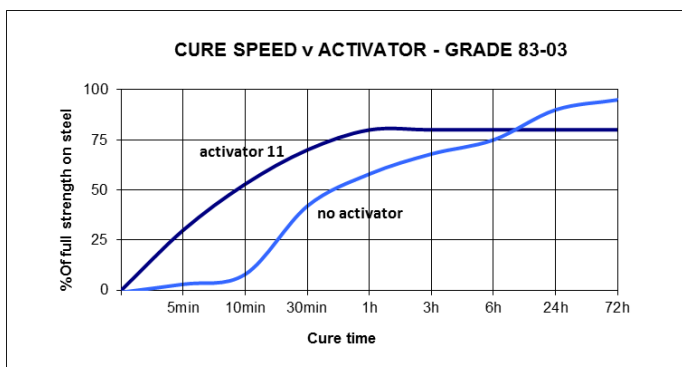


Heat ageing

The graph below shows the strength resistance behavior as a function of temperature/time.
Specimens – steel pin/collars tested in accordance with ISO 10123.

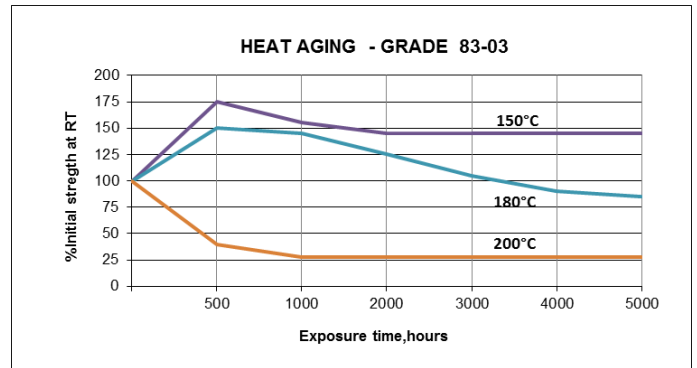

Chemical resistance

Aged under conditions below after 24 hours from polymerisation at indicated temperature.

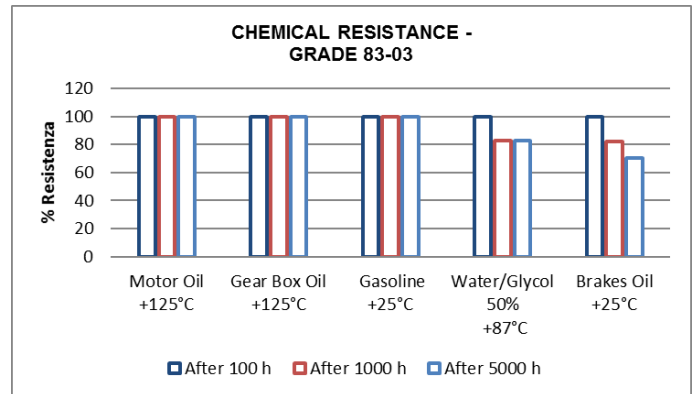

* For information on resistance with other chemicals, contact Loxeal Technical Service

Warnings

This adhesive is not approved for usage with neither pure nor with gaseous oxygen.
It is not suitable for applications on plastics.
The liquid product may damage paints and elastomers. If the product gets in contact, even accidentally, with some thermoplastics, stress cracking of the plastics could happen.

Safety and handling

Consult Material Safety Data Sheet before use.

Directions for use

- Clean the surfaces with Loxeal Cleaner 10 and allow to dry.
- Curing time may be slower if gaps are large and/or on inactive surfaces: the use of Loxeal Activator 11 can be considered to reduce it.
- Shrink fitted assemblies: if the collar is heated up, apply the adhesive to the pin. If the pin is cooled down, apply the adhesive to the collar. If both heating and cooling are required, apply the adhesive to the cooled part avoiding condensation.
- Press fitting assemblies: apply the adhesive on the pin and collar and assemble to the required pressure using a press.
- Slip fitted assemblies: apply the adhesive on the leading edge of the pin and on the inner surface of the collar. Assemble with a twisting action to ensure full coverage.
- Allow the parts to achieve functional strength before subjecting them to any service loads.
- When used as a sealant: apply a bead of adhesive to 360° between the first and second male thread, screw the female giving the desired pre-torque. For large diameter fittings and threads, apply the adhesive on both parts.

Disassembly and cleaning

To disassemble the pieces, use conventional tools. When possible, disassembly is made easier by heating pieces at +150°C/+250°C and hot disassembling them.

Remove the cured product mechanically and finish cleaning with Acetone.

Storage

Keep product in a cool and dry room at no more than +25°C. To avoid contaminations do not refill containers with used product. For further information on applications, storage and handling contact Loxeal Technical Service

Note

The data contained herein, obtained in Loxeal laboratories, are given for information only; if specifics are required, please contact Loxeal Technical Department.

Loxeal ensures abiding quality of supplied products according to its own specifics. Loxeal cannot assume responsibility for the results obtained by others which methods are not under Loxeal control. It is user's responsibility to determine suitability for user's purpose of any product mentioned herein. Loxeal disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Loxeal products. Loxeal specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.