

LOXEAL 83-50

Description

Fast curing anaerobic adhesive for metals, with high mechanical resistance, designed to seal and lock threaded joints and cylindrical couplings. Loxeal 83-50 provides high resistance to temperature, vibration, chemical agents and aging. Highly resistant to unscrewing on yellow brass, nickel-plated and chromed fittings.
 DVGW Approved as threaded joints sealant for gas pipes. WRAS listed for contact with hot and cold potable water, up to +85°C. Keeps the sealing property until the temperature of +200° C for short periods.

Typical physical properties

Composition: anaerobic methacrylate
 Colour: green
 Viscosity (+25°C - mPa s): 400 - 1.000
 Specific weight (+25°C - g/ml): 1,1
 max diameter of thread/ gap filling: M 25 / ¾" / 0,20 mm
 Shelf life +25°C: 1 year in original unopened packaging

Typical Curing performance

Curing rate depends on the assembly clearance, material surfaces and temperature. Functional strength is usually reached in 1-3 hours and full curing takes 24-36 hours. In case of passive surfaces and/or low temperature a fast cure can be obtained using Loxeal Activator 11.

Handling cure time (tests performed at RT on standard 1/2" threaded connections, fluctuations are possible depending on temperature and tolerances):

On brass (OT 58): < 60 s
 On nickel-plated and chromed: 5-20 minutes
 On steel: 2-5 minutes
 On Aluminium: 6-18 minutes

Bolt M10 x 20 Zn - quality 8.8 - nut h = 0,8 d
 Handling time: 2-5 minutes
 Functional cure time: 1-3 hours
 Full cure time: 2-4 hours

Typical Curing properties at +25°C

Bolt M10 x 20 Zn - quality 8.8 - nut h = 0,8 d
 Locking torque (ISO 10964):
 - breakaway: 25-35 N m
 - prevailing: 40-50 N m
 Shear strength (ISO 10123): 25-35 N/mm²
 Impact resistance (ASTM D950): 5-12 kJ/m²
 Temperature range: -55°C/+200°C***


***Note: sealing properties are tested on specimens consisting of a set of fittings and 1 1/2" pipe tightened to 100 N m and subjected to the following thermal cycle after 24 hours from adhesive curing at room temperature:

1. Tests series are run for 24 hours from T =+150°C and leakage are checked at room temperature by inflate pressurized air into the pipe (at 7,5 bar) immersed in water (air bubbles detection mode)
2. Tests are carried out until temperature is affecting a leak in the sealing

Environmental resistance


Hot strength

The graph below shows the mechanical strength vs. temperature.
 ISO 10964 - Bolt M10 x 20 Zn - quality 8.8 - nut h = 0,8 d at +25°C - pre-torque 5 N m

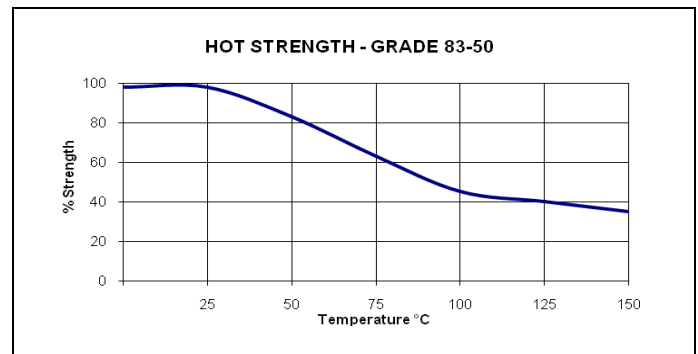


Cure speed v substrate

The graph hereunder shows the breakaway strength development of the product (with time) on steel pin/collars tested in accordance with ISO 10123 at +25°C.

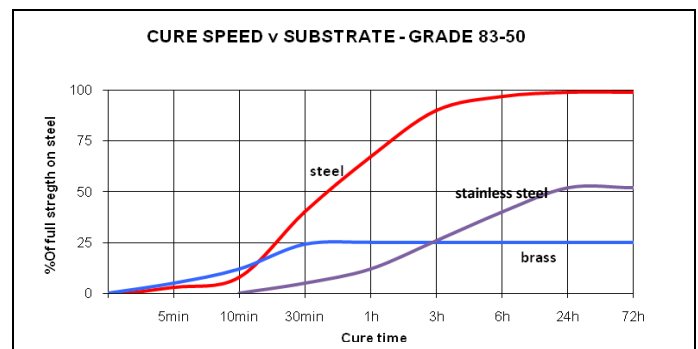


Cure speed v gap

The graph below shows the product shear strength (as %) at different increasing controlled gaps.
Specimens - Steel pins/collars, tested in accordance with ISO 10123 at + 25°C.

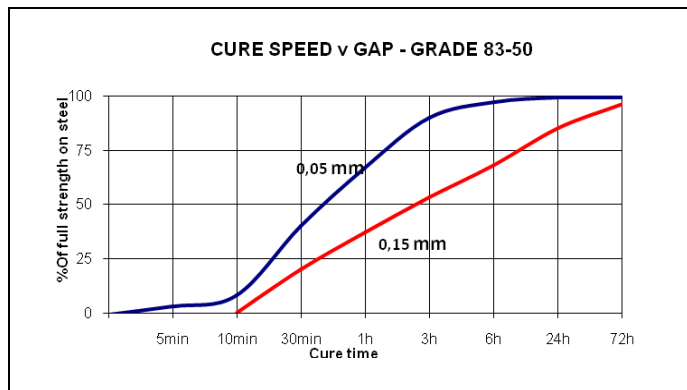


Cure speed v temperature

The following graph shows the breakaway strength of the product (as %) at different temperatures.
Specimens – steel pin/collars tested in accordance with ISO 10123.

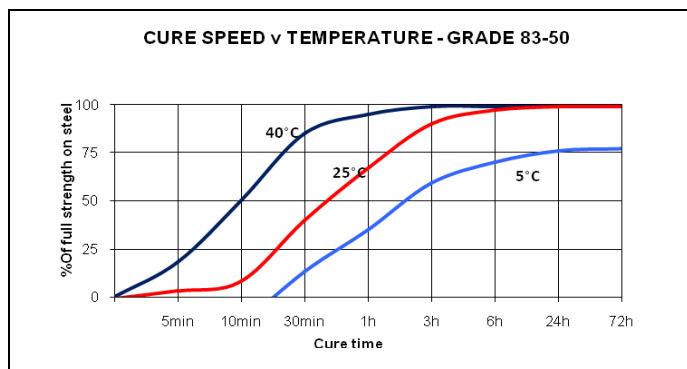


Cure speed v activator

Polymerization could be slowed down by substrate nature, large gaps; cure speed can be improved by applying appropriate activator to the substrate(s).
The following graph shows the breakaway strength of the product (as %) and the cure speed development using our activator 11 compared to the ones with no activator.
Specimens-steel pin/collar tested according to ISO 10123.

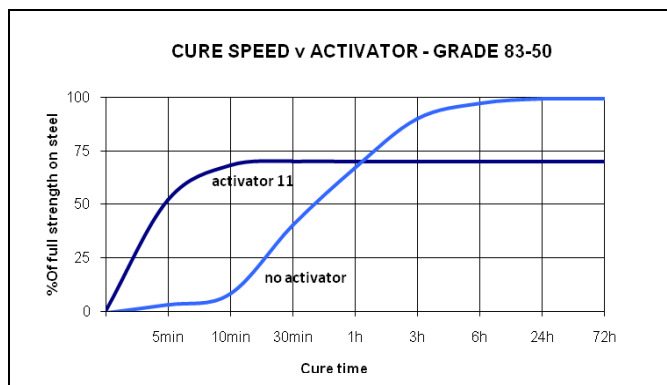


Heat aging

The graph below shows the strength resistance behavior as a function of temperature/time.
ISO 10964 - Bolt M10 x 20 Zn - quality 8.8 - nut h = 0,8 d at +25°C - pre-torque 5 N m

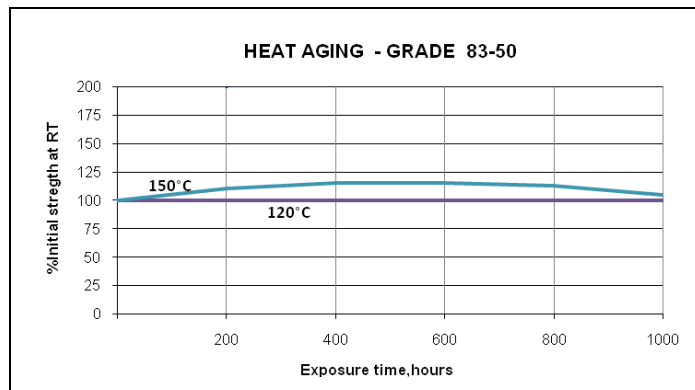

Chemical resistance

Aged under conditions below after 24 hours from polymerisation at indicated temperature.

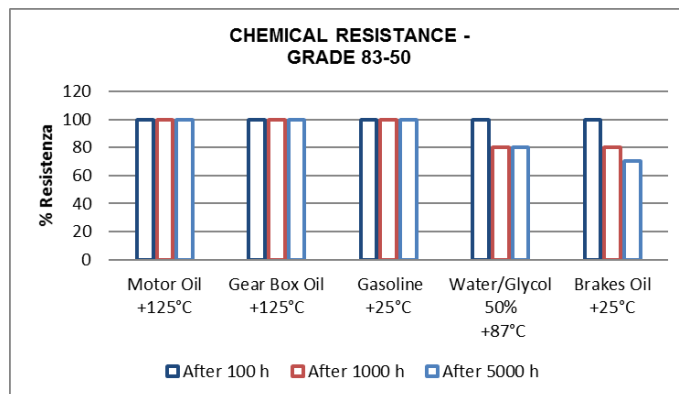

* For information on resistance with other chemicals, contact Loxeal Technical Service

Storage

Keep product in a cool and dry room at no more than +25°C. To avoid contaminations do not refill containers with used product. For further information on applications, storage and handling contact Loxeal Technical Service

Safety, handling and disposal

Consult Material Safety Data Sheet before use.

Instructions for use

The product is recommended for use on metal thread joints only.

Clean and degrease parts before bonding with Loxeal Pulitore 10.

Cut back stepped nozzle to give required bead size. Do not contaminate adhesive with metal.

Apply continuous bead circumferentially, 1-2 threads from the leading edge. Ensure sufficient is applied to give a complete seal.

Assemble and tighten the joint.

Wipe off any uncured excess adhesive from outside the joint.

Allow to cure. The time taken to reach a full cure will depend on the metals being used.

TIME TO CURE FOR USE WITH WHOLESOME (POTABLE) WATER

For Brass and Copper allow 24 hours at +20°C.

For Stainless Steel and Aluminium allow 7 days at +20°C.

WRAS Approval: for use with cold and hot water up to +85°C.

Liquid product can damage coating, some plastics and elastomers and late stress-cracking events might be induced if used with some thermoplastics.

For application on non metal materials, contact Loxeal Technical Service.

For disassembly, use normal tools and eventually heat pieces at +150°C/+250°C, remove any residue of cured product mechanically and clean parts with Acetone.

Note

The data contained herein, obtained in Loxeal laboratories, are given for information only; if specifics are required, please contact Loxeal Technical Department.

Loxeal ensures abiding quality of supplied products according to its own specifics. Loxeal cannot assume responsibility for the results obtained by others which methods are not under Loxeal control. It is user's responsibility to determine suitability for user's purpose of any product mentioned herein. Loxeal disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Loxeal products. Loxeal specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.